

Technical specification :

Rated voltage: 8pos
IEC 61076-2-101 30 V

Current rating: 2 A at 40°C
IEC 61076-2-101

Insulation resistance: >=100 MΩ
IEC 60512

Pollution degree: 3/2
IEC 60664-1

Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -30°C ... +80°C
EN 60512-11-10
EN 60512-11-4 -40°C ... +85°C

Mating cycles: >=100
IEC 60512-9a

Cable specification:

Temperatur range:
static -40°C ... +80°C
flexible -25°C ... +80°C

Materials:

Contact: CuZn, Ni b / Au 0,2 gal.

Contact carrier: PA, UL 94 V-0

Sealing: FPM

Coupling nut: GD-Zn, Nickel plated


Moulding body: TPU, UL 94 HB, grey

Installation specification:

Recommended torque: 0,6 Nm

Conec installation tool: Torque wrench: 36-000200
Insert across flats 13: 36-000220

Contact assignment:

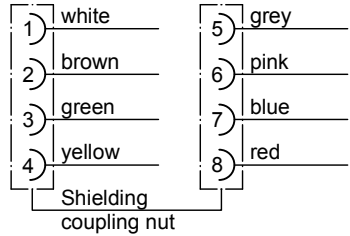

Part no:	Description:	Length L:	Cable:
43-12431	SAL - 12S - RKW8 - 2 / G3	2m	PVC, UL 2464, grey, 8x0,25mm ² Cable: 781-G32800
43-12432	SAL - 12S - RKW8 - 3 / G3	3m	
43-12433	SAL - 12S - RKW8 - 5 / G3	5m	
43-12434	SAL - 12S - RKW8 - 10 / G3	10m	
43-xxxxx	SAL - 12S - RKW8 - ... / G3	x	

DO NOT ALTER CAD DRAWING BY HAND RoHS & REACH compliant	Index: d 29.06.16 Wil Ä6218 moulding body contour corrected		dim. in mm	title: Female connector M12x1 angled, 360°-shielding		
						date name
	tolerance of cable: L ≤ 4m: L + 40mm L > 4m: L + 1%		drawn 13.10.08 Mankopf	dwg no: 43K1A760		
	general tolerance: 0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm * ± 5°		appd. 13.10.08 Fromm			
	THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH		CONEC ®		part no: see table	